Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

BNC 50 ohm Caps & Accessories

Amphenol®

Fig. 1

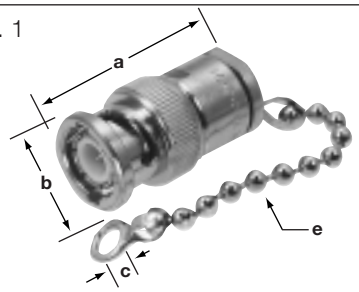

BNC Res. Term. Caps & Chains
35650-51
35650-75
4700-51

Fig. 2



BNC Resistor Term. Male Cap
46650-51 50Ω

Fig. 3

BNC Resistor Term. Male Caps
46650-51RFX 50Ω
46650-75RFX 75Ω
46650-93RFX 93Ω

Fig. 4



BNC Male Cap and Chain
31-6

Fig. 5

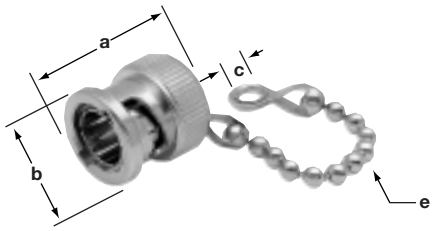

BNC Male Shorting Cap and Chain
31-17

Fig. 6



BNC Male Shorting Cap
5275

Fig. 7



Grounding Lug
31-759

Fig. 8



Grounding Lug
31-10152-RFX

BNC CAPS & ACCESSORIES

Description		Dimensions, inches (millimeters) a	b	c	e	Notes Plt.	Ins.	Military Number	Amphenol Number	Fig.	
Male Cap & Chain Resistor Terminated, 1% 1/2watt	50Ω	1.19(30.2)	.562(14.3)	.144(3.7)	3.50(88.9)	P1	D1	—	**35650-51***	1	
	75Ω					P1	D1	—	**35650-75***	1	▲
	51Ω					P1	D6	MX-554	**4700-51*■**	1	
Male Cap, Resistor Terminated, 1% 1 watt	51Ω	1.12(28.6)	.562(14.3)	—	—	P1	D1	—	**46650-51***	2	▲
Male Cap, Resistor Terminated, 1% 1 watt	50Ω	1.11(28.1)	.571(14.5)	—	—	P1	D23	—	**46650-51RFX**	3	▲
	75Ω								**46650-75RFX**	3	▲
	93Ω								**46650-93RFX**	3	
Male Cap & Chain		.688(17.5)	.563(14.3)	.130(3.3)	2.25(57.2)	P3	—	CW-123/U	**31-6***	4	▲
Male Shorting Cap & Chain		.688(17.5)	.563(14.3)	.144(3.7)	2.50(63.5)	P1	—	CW-159/U	**31-17***	5	
Male Shorting Cap		.594(15.1)	.563(14.3)	—	—	P1	—	—	**5275***	6	
Pkg. of 25 Lugs Used Inside Panel on Front Mount Bulkhead Receptacles to Ground Cable Shield*		.961(24.4)	.578(14.7)	—	—	P3	—	(IBM 2245373)	**31-759***	7	▲
Pkg. of 25 Lugs Used Inside Panel on Front Mount Bulkhead Receptacles for Ground Wire to Circuit		1.156(29.4)	.578(14.7)	—	—	P8	—	—	**31-10152-RFX***	8	▲

■ IBM 3110787 * recognized under the component program of U.L., Inc. ▲ distributor stocked